


## Engineering Instructions for Enclosed Addressable manual call point 3339.

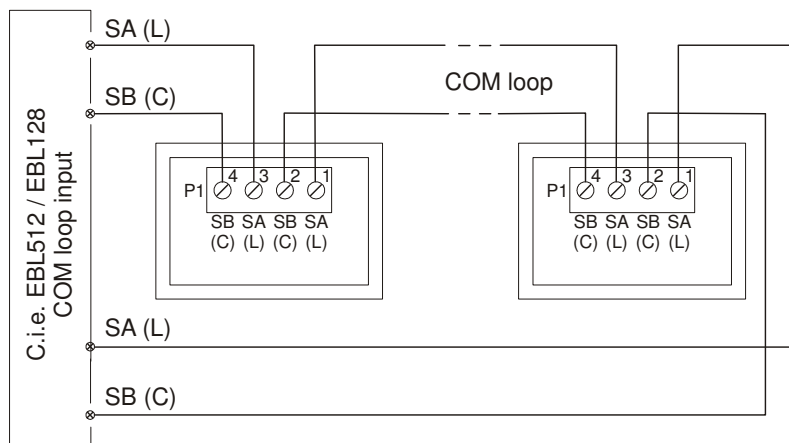

Note! More information and figures are found in the supplied “IP67 Weather proof call point installation details”.

### 1. Apply glands

There are drill positions marked on the top and bottom of the IP67 back box for cable glands – max. diameter 20mm. Use caution when fitting glands to ensure IP67 integrity is maintained.

### 2. Mounting of the backbox

Mount the IP67 back box on the wall. Use the existing mounting holes.

### 3. Program the COM loop address

Program the COM loop address of the enclosed manual call point with the 3314 address setting tool. Two flying leads (wires) are connected to the terminal block, for connection of the 3314 address setting tool's connection cable. The wires are to be disconnected before the COM loop wires are connected.

Note! The address has to be programmed before the m.c.p. is connected to the COM loop.

### 4. Wiring

Use single copper wire, 0.6 - 1.2 mm in diameter. Strip its coating by 10 mm and put it into the terminal respectively. Tighten the terminal screws firmly, max. torque 0.4 Nm.

The wires from the c.i.e. "COM loop input" shall be connected to the SA and SB terminals respectively according to the figure.

Connect the next unit or the wires going back to the c.i.e. "COM loop input" to the SA and SB terminals in the unit according to the figure.

### 5. Plugging the front in the IP67 back box

Put the front cover in position. Fix with the four enclosed screws.

All technical features and data are subject to changes without notice, resulting from continuous development and improvement.

Engineering instructions	Date of issue	Revision / Date of revision
MEW01013	2007-10-17	